



MOVE IT 25 S system

trimless/surface/suspended


EN Thin extruded aluminium profile with 31mm height and 28mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking

DE Niedriges Aluminiumstrangpressprofil mit 31mm Höhe und 28mm Fugenbreite; wahlweise für den randlosen Einbau in Gipskartondecken (Wand- oder Deckenmontage) mit 12,5mm Deckenstärke; oder für Wand-/Deckenanbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung, inkl. schwarzer Einspeiseleitung); optional mit indirekter Lichtkomponente für zusätzliche Akzentuierung der Decke; für Lichtsysteme; linear, 90° Winkelverbinder oder 90° CURVE Element; mit integriertem Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfläche eloxiert bzw. pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze durch Magnethalterung + Verriegelung

Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118lm/W
L80 @ 50 000h
non DIM, DALI-2

Types



connector



corner



curve


Colours



standard



xal.com/colours



custom cut on
building site

Order options

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005


Options on request

CONNECTOR

T-connector
X-connector

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 25 S trimless



INSTALLATION TRACK

L (mm)		ORDER CODE
617	channel	050-72120➦8
1217	channel	050-72140➦8
2417	channel	050-72180➦8
3622	channel	050-72190➦8
cust. cut	channel (non DIM)	E83131.....8
cust. cut	channel (DALI-2)	E83141.....8
672x645	channel corner* 90°	050-72110➦8
661x661	channel corner* ceiling to wall 90°	050-72111➦8

*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7210008

BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000.....8B

blind cover can be shortened as desired

CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321➦0
mechanical linear connector (pair)	050-2011110



POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm ²	050-2020110
DALI-2 2×2,5 + 2×0,5mm ²	050-2020130

cable length 500 mm

Electrical accessories

see following pages



Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR





CABLE SUSPENSION

chrome	0
black	8

Options on request

CONNECTOR

T-connector	
X-connector	



MOVE IT 25 S surface / suspended



INSTALLATION TRACK / BLIND COVER

L (mm)

620	channel
1220	channel
2420	channel
3625	channel
cust. cut	channel (non DIM)
cust. cut	channel (DALI-2)
637x610	channel corner* 90°
666x666	channel corner* ceiling to wall 90°

*incl. electrical connector set

1217	blind cover
2417	blind cover
3622	blind cover
cust. cut	blind cover

ORDER CODE

050-73120	
050-73140	
050-73180	
050-73190	
E83151	
E83161	
050-73110	
050-73111	

050-7004008	
050-7008008	
050-7009008	
E83000	

CURVE CONNECTOR

TYPE

mechanical & electrical R 300 mm
mechanical R 300 mm

ORDER CODE

050-731303	
050-731311	

Accessories

END CAPS

TYPE

end caps (pair)

ORDER CODE

050-731000	
------------	--

CONNECTOR SET

TYPE

mechanical linear conn. incl. 1500 mm cable susp.
mechanical linear connector surface
mechanical & electrical linear connector

ORDER CODE

050-201131	
050-2011410	
050-2031230	

POWER FEEDER UNIT

TYPE

TYPE	L (mm)
non DIM 2×2,5mm ²	2000
DALI-2 2×2,5 + 2×0,5mm ²	2000
non DIM 2×2,5mm ²	4000
DALI-2 2×2,5 + 2×0,5mm ²	4000

ORDER CODE

050-2022110	
050-2022130	
050-2024110	
050-2024130	

CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE

TYPE	L (mm)
ceiling fastener	67
cable suspension*	1500
canopy	
wall mounting accessory	

ORDER CODE

050-204111	
005-215211	
005-231171	
050-2044118	

*use every 1200 mm

Electrical accessories

see following pages

Order options

COLOUR TEMPERATURE

3000 K

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8

Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM






COLOUR TEMPERATURE

2700 K	
4000 K	
tunable white 2700–6500 K*	

*DALI-2 DT8

CONNECTOR

T-connector	
X-connector	



MOVE IT 25 S suspended indirect



INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-74125
1220	15.3 W	1810 lm	050-74145
2420	33 W	3890 lm	050-74185
3625	51 W	6000 lm	050-74195
637x610 corner*	13.1 W	1550 lm	050-74110

incl. chrome cable suspension for L=1220/2420/3625 mm

no custom cut on building side; *incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000...8B

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-731000

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm ²	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	2000	050-2022130
non DIM 2 × 2,5 mm ²	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	4000	050-2024130

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

*use every 1200 mm

Electrical accessories

see following pages



MOVE IT 25 system

trimless / surface / suspended


EN Extruded aluminium profile with 28 mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; node connectors, up to 6 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

DE Aluminiumstrangpressprofil mit 28 mm Fugenbreite; für randlosen Einbau in Gipskartondecken (Wand- oder Deckenmontage) mit 12,5 mm Deckenstärke; oder für Wand-/ Deckenanbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung, inkl. schwarzer Einspeiseleitung); optional indirekte Lichtkomponente für zusätzliche Akzentuierung der Decke; für Lichtsysteme; linear, 90° Winkelverbinder oder 90° CURVE Element; Knotenverbinder, bis zu 6 Profilanschlussmöglichkeiten; mit Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfl. elox. bzw. pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze durch Magnethalterung + Verriegelung; schallabsorbierendes Zubehör erhältlich


Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



connectors



node



corner



curve


Colours




standard



xal.com/colours



custom cut on building site



acoustic elements

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005






Options on request

CONNECTOR

T-connector	
X-connector	

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 25 trimless



INSTALLATION TRACK

L (mm)

		ORDER CODE
617	channel	050-72020-8
1217	channel	050-72040-8
2417	channel	050-72080-8
3622	channel	050-72090-8
cust. cut	channel (non DIM)	E83031-8
cust. cut	channel (DALI-2)	E83041-8
672x645	channel corner* 90°	050-72010-8
661x661	channel corner* ceiling to wall 90°	050-72011-8

*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7200008

BLIND COVER

L (mm)

	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000-8B

blind cover can be shortened as desired

CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321-0
mechanical linear connector (pair)	050-2011110

POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm ²	050-2020110
DALI-2 2×2,5 + 2×0,5mm ²	050-2020130

cable length 500 mm

Electrical accessories

see following pages

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
○ traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX / END CAP

● jet black RAL 9005	8
○ traffic white 9016 / jet black 9005 P	
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR

CABLE SUSPENSION







chrome	0
black	8

NODE CONNECTOR

MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X



MOVE IT 25 surface/suspended



INSTALLATION TRACK / BLIND COVER

L (mm)		ORDER CODE
620	channel	050-73020
1220	channel	050-73040
2420	channel	050-73080
3625	channel	050-73090
cust. cut	channel (non DIM)	E83051
cust. cut	channel (DALI-2)	E83061
637x610	channel corner* 90°	050-73010
666x666	channel corner* ceiling to wall 90°	050-73011
*incl. electrical connector set		
1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 ···· 8B

CURVE CONNECTOR

TYPE	ORDER CODE
mechanical & electrical R 300 mm	050-730303
mechanical R 300 mm	050-730311

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

NODE CONNECTOR

TYPE	ORDER CODE
NODE surface mounted	050-203333
NODE surface mounted incl. feeder	050-202243
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical linear connector surface	050-2011410
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm ²	2000	050-2022110
DALI-2 2×2,5 + 2×0,5 mm ²	2000	050-2022130
non DIM 2×2,5 mm ²	4000	050-2024110
DALI-2 2×2,5 + 2×0,5 mm ²	4000	050-2024130

CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204111
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

Order options

COLOUR TEMPERATURE

3000 K

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX/END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8

NODE CONNECTOR

MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X

Options on request

COLOUR RENDERING INDEX






CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700 K
4000 K
tunable white 2700–6500 K*

*DALI-2 DT8

LUMINOUS FLUX value calculated for
3000 K, CRI ≥ 90, colour white/black



MOVE IT 25 suspended indirect



INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-74025
1220	15.3 W	1810 lm	050-74045
2420	33 W	3890 lm	050-74085
3625	51 W	6000 lm	050-74095
637x610 corner*	13.1 W	1550 lm	050-74010

incl. chrome cable suspension for L=1220/2420/3625 mm

no custom cut on building side; *incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 · · · · 8B

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

NODE CONNECTOR

TYPE	ORDER CODE
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm ²	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	2000	050-2022130
non DIM 2 × 2,5 mm ²	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	4000	050-2024130

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages





Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



Electrical accessories

POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
100 W □ PC II η 92 %		intrack	403-26-46	050-2071038
150 W □ PC II η 92 %		intrack	403-26-46	050-2071138

incl. feeder cable 2000 mm; ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		surface	305-144-54	050-20551
100 W □ PC II η 92 %		surface	455-104-40	050-20554
150 W □ PC II η 92 %		surface	455-104-40	050-20552
250 W □ PC II η 93 %		surface	455-104-40	050-20555
320 W ⊕ PC I η 94 %		surface	305-144-54	050-20553

ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		external	163-43-32	002-62133
100 W □ PC II η 92 %		external	350-30-18	002-62134
150 W □ PC II η 92 %		external	350-30-18	002-62135
250 W □ PC II η 93 %		external	400-40-22	002-62139
320 W ⊕ PC I η 94 %		external	252-90-44	002-60320

ENEC approved

POWER SUPPLY BASIC 48 V

220-240 V | 50-60 Hz | □ PC II | Lifetime @ 120 W, 45° ambient temp. cascable max. 3 devices

TYPE	EFFICIENCY / LIFETIME	W-H-D (mm)	ORDER CODE
160 W η 94.5 % / > 100.000 h		72-90-63	005-6520210

DIN RAIL POWER SUPPLY PRO 48 V

220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature cascable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY / MTBF	W-H-D (mm)	ORDER CODE
240 W η 92 % / > 400.000 h		60-125-100	005-6220110
480 W η 93 % / > 350.000 h		120-125-100	005-6220210

DALI-2 SELV DEVICE

TYPE	L-W-H (mm)	ORDER CODE
control unit	213-37-26	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated

DALI SENSOR

TYPE	L-W-H (mm)	ORDER CODE
ESSENTIAL sensor (brightness & presence)	125-28-45	050-2063178

WIRELESS TO DALI-2 CONTROL DEVICE

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2065230

DALI-2 SELV device required

WIRELESS TO DALI-2 REPEATER

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2066230

MIDDLE FEED

TYPE	ORDER CODE
DALI-2 2×2,5 + 2×0,5 mm ²	050-2038130

cable length 2000 mm

Blique by Nobis
Stockholm, SE –
by Wingårdhs





JUST

spotlight inset 25/25S

Quickinfo

2700K, 3000K, 4000K, TW, CWD
CRI ≥ 90, 2 SDCM
non DIM, DALI-2

L95 @ 50 000h
JUST 32 focus up to 78lm/W


L80 @ 50 000h
JUST 45 up to 92lm/W

L90 @ 50 000h
JUST 55 up to 109lm/W

Types

JUST 32 focus	JUST 45	JUST 55
		
73 ø 32	88 ø 45	100 ø 55

Colours




Light distributions

JUST 32 focus



focus

JUST 45




super spot med. flood


JUST 55



spot med. flood



TW 1800–3000K
or 2700–6500K



CWD
2000–3000K

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1
colour warm dim. 2000–3000 K*	
tunable white 1800–3000 K**	
tunable white 2700–6500 K**	

*DALI-2 **DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

BEAM ANGLE JUST 45

medium 23°	M
flood 44°	F

BEAM ANGLE JUST 55




spot 16°	S
medium 23°	M
flood 37°	F

Options on request

OPTICAL ACCESSORIES

elliptical sculpture foil
snoot
colour filter (red, blue, green, etc.)

only for JUST 32 focus



JUST 32 focus 17–43°



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
5.5 W	411 lm	050-0111

JUST 45



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
6.0 W super spot 8°	285 lm	050-0131
10.9 W	960 lm	050-0131
12 W CWD 2000–3000 K	430 lm	050-0131E3
11 W TW 1800–3000 K	555 lm	050-0131L3
11 W TW 2700–6500 K	683 lm	050-0131D3

JUST 55



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
12.7 W	1330 lm	050-0143
19.1 W	1820 lm	050-0142

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
JUST 32 focus	30·4	007-1965178
JUST 45	42·3	007-1965188
JUST 55	50·3	007-1965598

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965880
JUST 55	50·3	007-1965890

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965980
JUST 55	50·3	007-1965990

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965780
JUST 55	50·3	007-1965790

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, lens flood 2700 K -5%, 4000 K +5%



MOVE IT 25 SYSTEM



reddot award 2019
winner



DESIGN
AWARD
2019


PIVOT

graphic light inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI $\geq$ 90, 3 SDCM
up to 123 lm/W
L90 @ 50 000 h
non DIM, DALI-2


Types




Colour



Light distribution



tunable white
1800–4000 K



CRI $\geq$ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
tunable white 1800–4000 K*	L

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

4000 K

MATERIAL COLOUR

○ traffic white RAL 9016




LIGHT INSET 25S




PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 1 3 1 2 :: 8 0
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 1 3 1 3 :: 8 0
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 1 3 1 4 :: 8 0
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 1 3 1 5 :: 8 0
	3000 K	3160 lm		
32 W	2700 K	3570 lm	1810	0 5 0 - 1 3 1 6 :: 8 0
	3000 K	3790 lm		

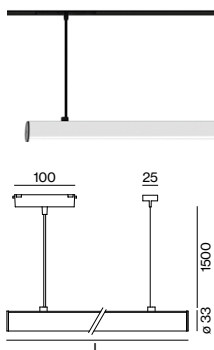

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 2 2 :: 8 0
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 2 3 :: 8 0
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 2 4 :: 8 0
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 2 5 :: 8 0
	3000 K	3160 lm		




LIGHT INSET 25/45



PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 1 2 :: 8 0
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 1 3 :: 8 0
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 1 4 :: 8 0
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 1 5 :: 8 0
	3000 K	3160 lm		
32 W	2700 K	3570 lm	1810	0 5 0 - 0 3 1 6 :: 8 0
	3000 K	3790 lm		

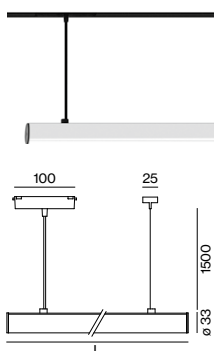

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 2 2 :: 8 0
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 2 3 :: 8 0
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 2 4 :: 8 0
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 2 5 :: 8 0
	3000 K	3160 lm		



FLEXTRACK

system extension 25/25S


EN Thin extruded aluminium profile with 31mm height and 28mm width groove; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; for installation in two MOVE IT 25 or 25 S profiles; profile can be installed and moved without tools by means of magnetic holders+locking; mount 360° rotatable and freely slidable on one end; light insets can be installed flexibly and without tools by means of magnetic holders+locking

DE Niedriges Aluminiumstrangpressprofil mit 31mm Höhe und 28mm Fugenbreite; mit integriertem Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfläche eloxiert bzw. pulverbeschichtet; zum Einsetzen in zwei MOVE IT 25 bzw. MOVE IT 25 S Profile; Profil mittels Magnethalter+Verriegelung werkzeuglos einsetz- und verschiebbar; Halterung 360° drehbar und an einem Ende beliebig verschiebbar; flexible und werkzeuglose Montage der Lichteinsätze durch Magnethalterung + Verriegelung

Quickinfo

non DIM, DALI-2

Types



Colours




Order options

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X
*inside always in black	


MOVE IT 25 S



FLEXTRACK


L (mm)	ORDER CODE
620	050-75120
920	050-75130
1220	050-75140
1520	050-75150
1820	050-75160

MOVE IT 25



FLEXTRACK


L (mm)	ORDER CODE
620	050-75020
920	050-75030
1220	050-75040
1520	050-75050
1820	050-75060

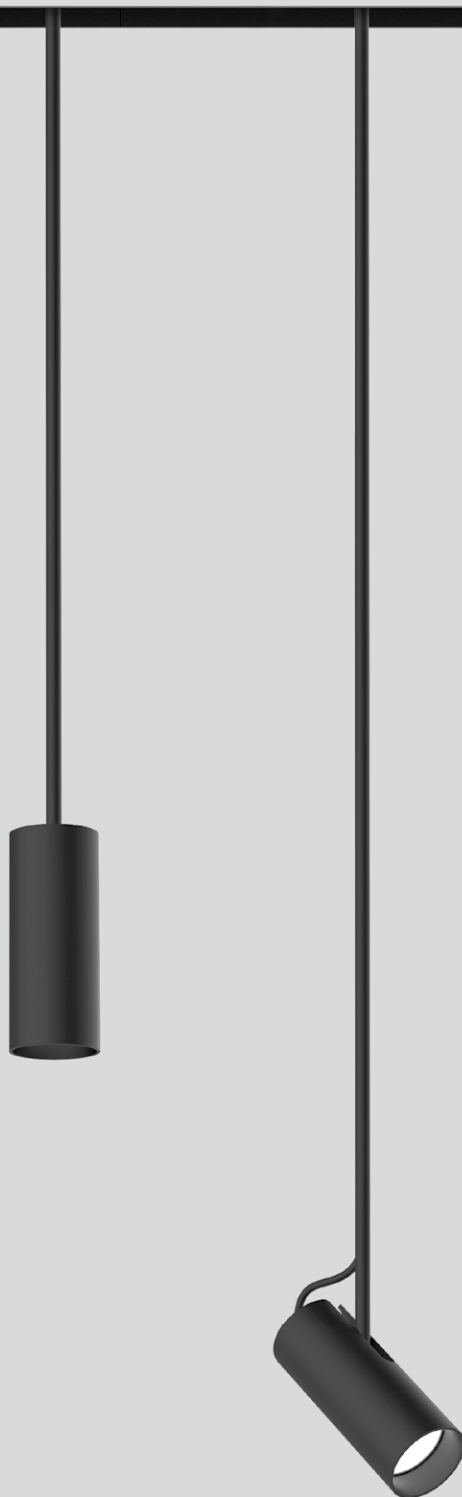

Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 84 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distributions




reddot winner 2020




DESIGN
AWARD
2020

ARY rod

decorative inset 25/25S/45



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

CABLE SUSPENSION

1500mm	5
2000mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200–4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE

medium 25°	M
flood 44°	F



ARY rod



DOWNLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 2 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	050-0 2 1 D 3

ARY rod adjustable



SPOTLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 3 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	050-0 3 1 D 3



Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	050-151011
MOVE IT 25/45	50-91	050-051011



RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	050-051021



Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	42-3	007-1965188
oval lens	42-3	007-1965880
soft lens	42-3	007-1965980
wallwasher lens	42-3	007-1965780



reddot winner 2020



DESIGN
AWARD
2020


ARY cable

decorative inset 25/25S/45


Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 84 lm/W
L90 @ 50 000 h
non DIM, DALI-2


Types




Colours



Light distributions



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

CABLE SUSPENSION

1500mm	5
2000mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200–4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE

medium 25°	M
flood 44°	F

SHADE COLOUR

● velvet beige RAL 085 80 10	C
● madeira brown RAL 050 40 40	T
● kingfisher grey RAL 230 60 10	L
● woodpecker olive RAL 10 50 20	G
○ signal white RAL 9003	W
● signal black RAL 9004	B



ARY cable



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	0 5 0 - 0 5 1 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	0 5 0 - 0 5 1 1 D 3

Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1

RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1

Optical accessories

SHADE


TYPE	Ø-H (mm)	ORDER CODE
cone 300	300-188	0 4 9 - 5 9 3 3 1 1
cone 400	400-253	0 4 9 - 5 9 3 4 1 1
cone 500	500-318	0 4 9 - 5 9 3 5 1 1

only available for ARY cable

HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	42-3	0 0 7 - 1 9 6 5 1 8 8
oval lens	42-3	0 0 7 - 1 9 6 5 8 8 0
soft lens	42-3	0 0 7 - 1 9 6 5 9 8 0
wallwasher lens	42-3	0 0 7 - 1 9 6 5 7 8 0

LUMINOUS FLUX value calculated for
CRI ≥ 90, colour white, lens flood

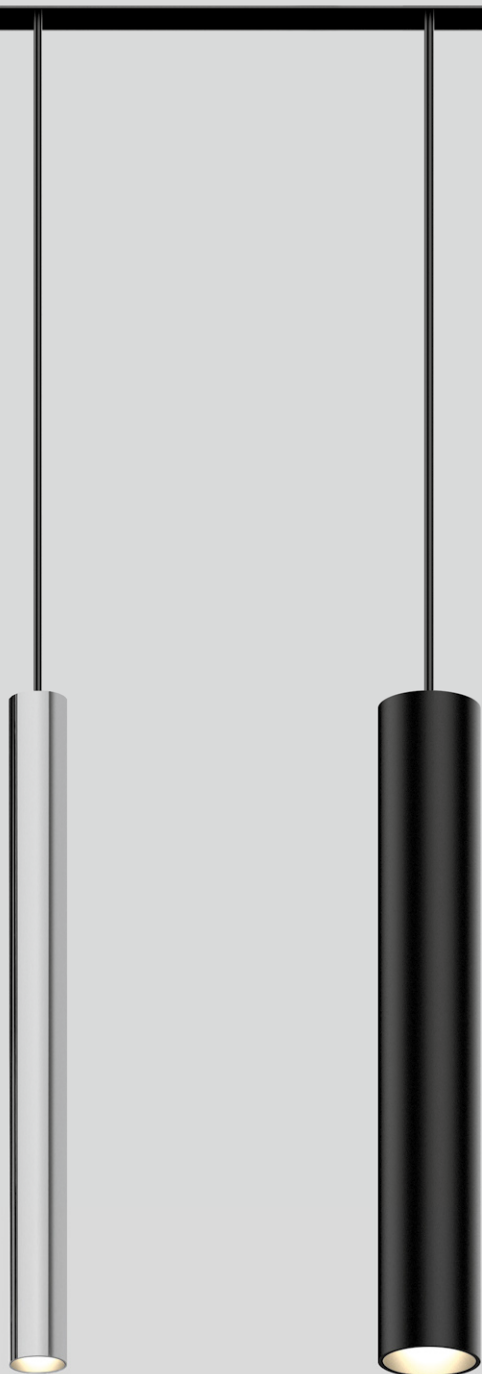


TULA

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI ≥ 90, 3 SDCM
up to 75 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types




Colours



Light distributions



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

HOUSING HEIGHT	L
300 mm	0
500 mm	1

CABLE SUSPENSION	⌘
1500 mm	7
2000 mm with hook*	8

*one ring included

COLOUR TEMPERATURE	⬢
2700 K	4
3000 K	5
tunable white 2200 – 4000 K*	

*DALI-2 DT8

CONTROL	⬢
non DIM	1
DALI-2	3


MATERIAL COLOUR	☑
○ chrome	4
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	■
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE	▲
medium 24°/25°	M
flood 30°/44°	F

Options on request

COLOUR TEMPERATURE	
4000 K	




TULA nano suspended




DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11W	2700 K	642lm	0 5 0 - L ⌘ 1 1 ⬢ ⬢ ▲
	3000 K	688lm	




TULA micro suspended



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	998lm	0 5 0 - L ⌘ 1 5 ⬢ ⬢ ▲
	3000 K	1048lm	
5.4 W	2200 – 4000 K	254lm	0 5 0 - L ⌘ 1 5 D 3 ⬢ ▲

Mounting accessories



RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1 ■




RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1 ■

Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
TULA micro honeycomb louver	42-3	0 0 7 - 1 9 6 5 1 8 8
TULA micro oval lens	42-3	0 0 7 - 1 9 6 5 8 8 0
TULA micro soft lens	42-3	0 0 7 - 1 9 6 5 9 8 0
TULA micro wallwasher lens	42-3	0 0 7 - 1 9 6 5 7 8 0

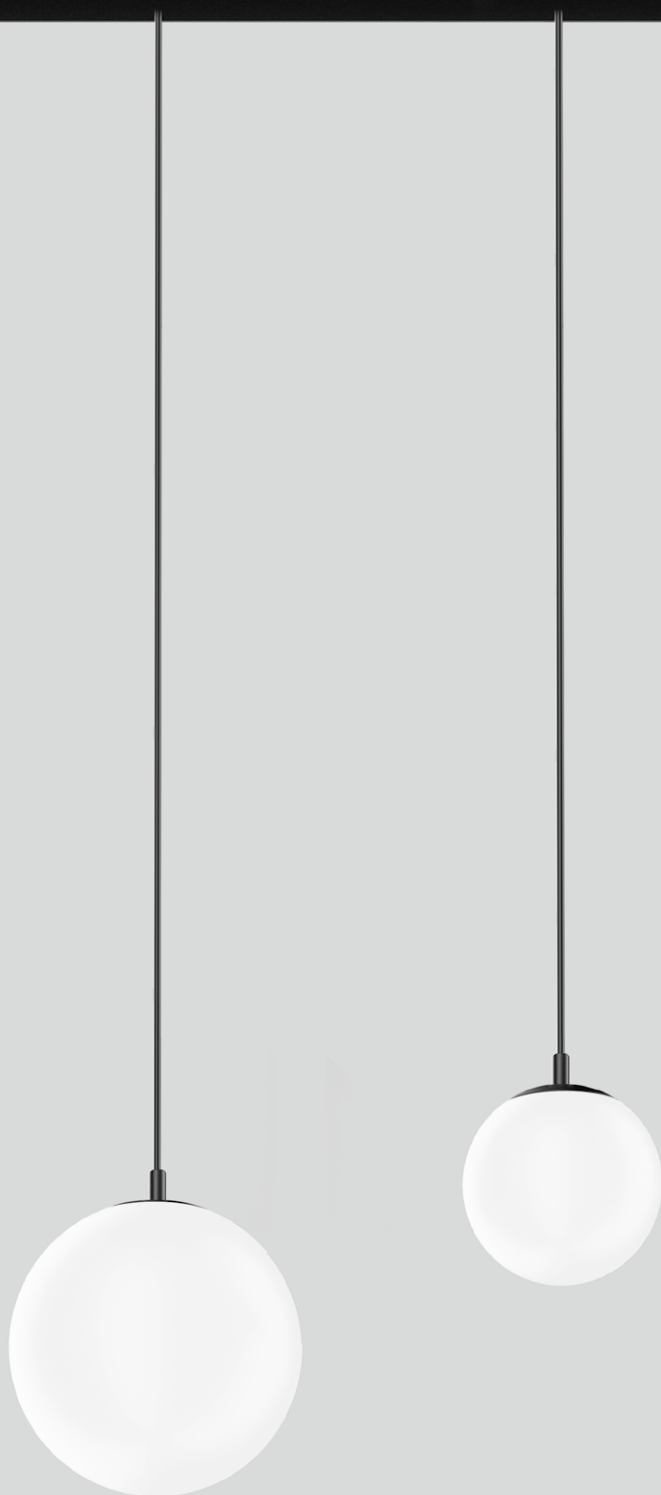


PAL

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
up to 55 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distribution



Order options


CABLE SUSPENSION	⚙
1500mm	5
2000mm with hook*	6
*one ring included	

COLOUR TEMPERATURE	⚙
2700 K	4
3000 K	5


CONTROL	⚙
non DIM	1
DALI-2	3

MATERIAL COLOUR	☑
○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	■
○ pure white RAL 9010	7
● jet black RAL 9005	8



PAL suspended



DOWNLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	Ø (mm)	ORDER CODE
9.1W	2700 K	472lm	80	0 5 0 - 1 ⚙ 1 1 ⚙ ☑
	3000 K	498lm		
9.1W	2700 K	472lm	120	0 5 0 - 1 ⚙ 1 3 ⚙ ☑
	3000 K	498lm		


Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1 ■

RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1 ■




INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥90, colour white, glass

**Quickinfo**

2700 K
CRI ≥ 95, 3 SDCM
up to 72 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types**Colours**

wästberg w201 Extra small pendant

Design by Claesson Koivisto Rune

Order options


CABLE SUSPENSION	
3000 mm	5
3000 mm with hook	6

COLOUR TEMPERATURE
2700 K

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8


ACCESSORY COLOUR	
○ pure white RAL 9010	7
● jet black RAL 9005	8



w201 Extra small pendant s1




DOWNLIGHT				ORDER CODE
INSET POWER	COLOUR TEMP.	LUMINOUS FLUX		
7.9W	2700 K	544lm		050-04814



w201 Extra small pendant s2



DOWNLIGHT				ORDER CODE
INSET POWER	COLOUR TEMP.	LUMINOUS FLUX		
7.9W	2700 K	572lm		050-04824




w201 Extra small pendant s3



DOWNLIGHT				ORDER CODE
INSET POWER	COLOUR TEMP.	LUMINOUS FLUX		
7.9W	2700 K	572lm		050-04834

Mounting accessories



RING track mounted			ORDER CODE
TYPE	Ø-H (mm)		
MOVE IT 25 S	50-70		050-151011
MOVE IT 25/45	50-91		050-051011



RING ceiling mounted			ORDER CODE
TYPE	Ø-H (mm)		
MOVE IT 25/25S/45	50-88		050-051021

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥90, colour white

SPOT LINE / OPAL

linear inset 25


Quickinfo

2700 K, 3000 K, TW (opal)
 CRI ≥ 90, 3 SDCM
 SPOT LINE up to 82lm/W
 OPAL up to 101lm/W
 L80 @ 50 000 h
 non DIM, DALI-2


Types

MOVE IT 25




SPOT LINE



OPAL



Light distributions



Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
tunable white 1800–4000 K*	L
*only available for opal high performance inset DALI-2 DT8	


CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR
● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX
CRI ≥ 98 XPECTRUM


COLOUR TEMPERATURE
4000 K




LIGHT INSET 25



SPOT LINE				ORDER CODE
INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	
4.5 W	2700 K	336lm	155	0 5 0 - 0 2 2 0 :: 8 M
	3000 K	363lm		
8.9 W	2700 K	673lm	305	0 5 0 - 0 2 2 1 :: 8 M
	3000 K	726lm		
17.9 W	2700 K	1350lm	605	0 5 0 - 0 2 2 2 :: 8 M
	3000 K	1450lm		



OPAL HIGH PERFORMANCE				ORDER CODE
INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	
5.3 W	2700 K	451lm	305	0 5 0 - 0 2 1 1 :: 8 H
	3000 K	484lm		
10.6 W	2700 K	902lm	605	0 5 0 - 0 2 1 2 :: 8 H
	3000 K	968lm		
21.3 W	2700 K	1800lm	1205	0 5 0 - 0 2 1 4 :: 8 H
	3000 K	1940lm		
43 W	2700 K	3610lm	2405	0 5 0 - 0 2 1 8 :: 8 H
	3000 K	3870lm		




LIGHT INSET 25 S



OPAL HIGH PERFORMANCE				ORDER CODE
INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	
5.3 W	2700 K	402lm	305	0 5 0 - 1 2 1 1 :: 8 H
	3000 K	432lm		
10.6 W	2700 K	805lm	605	0 5 0 - 1 2 1 2 :: 8 H
	3000 K	864lm		
21.3 W	2700 K	1610lm	1205	0 5 0 - 1 2 1 4 :: 8 H
	3000 K	1730lm		
43 W	2700 K	3220lm	2405	0 5 0 - 1 2 1 8 :: 8 H
	3000 K	3460lm		

canyon solution for MOVE IT 25

Light distribution



spot line

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

WALLWASHER

linear inset 25/25S


Quickinfo

2700 K, 3000 K
CRI ≥ 90 , 3 SDCM
WALLWASHER up to 81lm/W
WW flush up to 82lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types

MOVE IT 25

WALLWASHER




WALLWASHER flush



MOVE IT 25 S


WALLWASHER flush



Light distribution



wall
washer



CRI ≥ 98
XPECTRUM

Order options


COLOUR TEMPERATURE		••
2700 K	4	
3000 K	5	
CONTROL		◆
non DIM	1	
DALI-2	3	

MATERIAL COLOUR	
● jet black RAL 9005	

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 98 XPECTRUM	

COLOUR TEMPERATURE	
4000 K	




LIGHT INSET 25



WALLWASHER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
13 W	2700 K	983 lm	450	0 5 0 - 0 2 3 2 •• 3 8 A
	3000 K	1050 lm		



WALLWASHER FLUSH


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	0 5 0 - 0 2 1 1 •• ◆ 8 A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	0 5 0 - 0 2 1 2 •• ◆ 8 A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	0 5 0 - 0 2 1 4 •• ◆ 8 A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	0 5 0 - 0 2 1 8 •• ◆ 8 A
	3000 K	3630 lm		

Optical accessories

ANTI-GLARE GRID

TYPE	L-W (mm)	ORDER CODE
WALLWASHER FLUSH	303-25	0 5 0 - 0 2 3 0 9 1 8

cluster solution to create anti-glare grid for all lengths




LIGHT INSET 25 S




WALLWASHER FLUSH

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	0 5 0 - 1 2 1 1 •• ◆ 8 A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	0 5 0 - 1 2 1 2 •• ◆ 8 A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	0 5 0 - 1 2 1 4 •• ◆ 8 A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	0 5 0 - 1 2 1 8 •• ◆ 8 A
	3000 K	3630 lm		

Light distributions



wallwasher



wallwasher flush

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black


Quickinfo

2700 K, 3000 K
CRI ≥ 90 , 3 SDCM
WALL GRAZER up to 107 lm/W
BATWING up to 104 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types

MOVE IT 25 S

WALL GRAZER / BATWING




Light distributions



WALL GRAZER / BATWING

linear inset 25S




CRi ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE	••
2700 K	4
3000 K	5
CONTROL	◆
non DIM	1
DALI-2	3
MATERIAL COLOUR	
● jet black RAL 9005	

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 98 XPECTRUM	
COLOUR TEMPERATURE	
4000 K	




LIGHT INSET 25 S



WALL GRAZER


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	525 lm	305	0 5 0 - 1 2 1 1 : 8 S
	3000 K	564 lm		
10.6 W	2700 K	1050 lm	605	0 5 0 - 1 2 1 2 : 8 S
	3000 K	1130 lm		
21.3 W	2700 K	2100 lm	1205	0 5 0 - 1 2 1 4 : 8 S
	3000 K	2260 lm		
43 W	2700 K	4200 lm	2405	0 5 0 - 1 2 1 8 : 8 S
	3000 K	4510 lm		




BATWING

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	512 lm	305	0 5 0 - 1 2 1 1 : 8 B
	3000 K	550 lm		
10.6 W	2700 K	1020 lm	605	0 5 0 - 1 2 1 2 : 8 B
	3000 K	1100 lm		
21.3 W	2700 K	2050 lm	1205	0 5 0 - 1 2 1 4 : 8 B
	3000 K	2200 lm		
43 W	2700 K	4100 lm	2405	0 5 0 - 1 2 1 8 : 8 B
	3000 K	4400 lm		

Light distributions




wall grazer



batwing

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

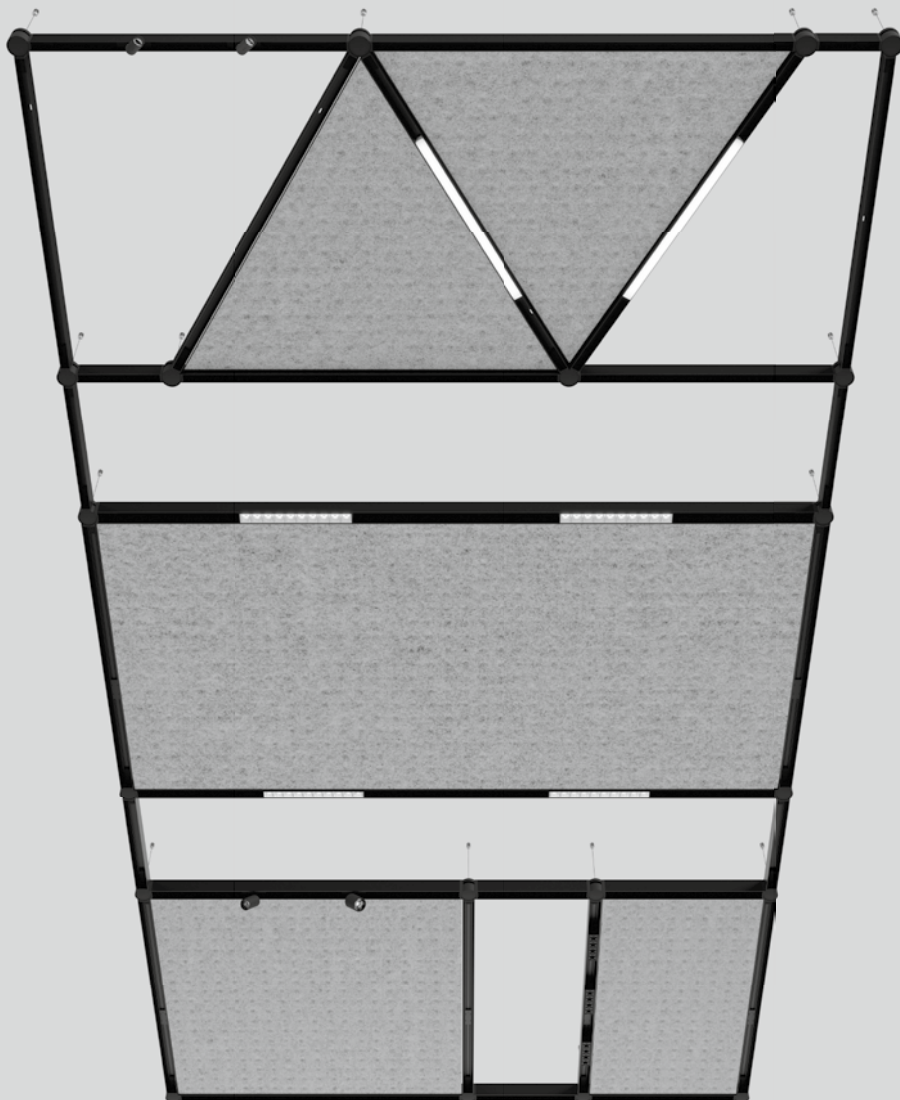

MOVE IT 25/45 system

acoustic elements

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; different versions: choice of square, rectangular or triangular design (only MOVE IT 25); high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25/45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools

DE Akustikelement aus hochwertigem, selbsttragendem, recyceltem PET-Filz mit schallabsorbierenden Eigenschaften; unterschiedliche Varianten: Bauform wahlweise quadratisch, rechteckig oder dreieckig (nur MOVE IT 25); optisch und haptisch hochwertige Oberfläche mit Musterprägung; Absorption des Direktschalls und des von der Decke reflektierten Schalls; dadurch hohe akustische Performance; zum Einlegen in das MOVE IT 25/45 suspended system aus Knotenverbindern und Profilen; nachträgliches Einlegen in bereits installiertes MOVE IT suspended system möglich; werkzeuglose Montage


Quickinfo

PET felt


♻️ from recycled material
up to absorption class A

🔥 flame retardant version available


Types

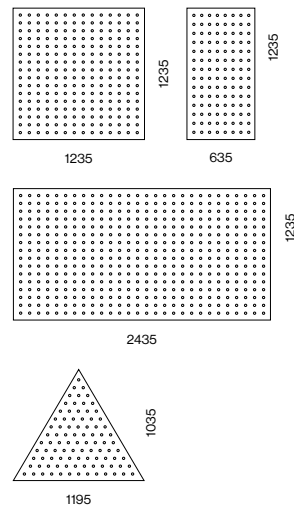


Acoustic colours




flat acoustic
inlay 25 mm



embossed
finish




quick and easy
to retrofit



sensor inset
available

Order options

ACOUSTIC COLOUR	
☐ white	W
☐ marble grey	D
☐ anthracite	B
☐ black	L
☐ limestone	S

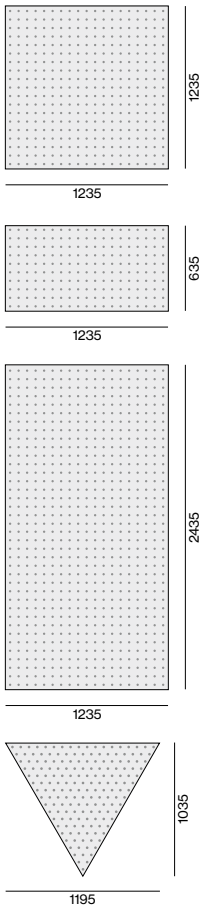

MOVE IT 25/45 acoustic suspended

 PET felt	<table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td colspan="5">$\alpha_w 1.00$</td></tr></table>	A	B	C	D	E	$\alpha_w 1.00$					1.30 NRC	1.32 SAA
A	B	C	D	E									
$\alpha_w 1.00$													


ACOUSTIC ELEMENT

TYPE	L·W·H (mm)	ORDER CODE
square grid inlay	1235·1235·25	050-231121 ☒
half grid inlay	635·1235·25	050-231221 ☒
double grid inlay	2435·1235·25	050-231321 ☒
triangle inlay*	1195·1035·25	050-231421 ☒

mounting only in MOVE IT 25/45 system with NODE connector + track 620 mm, 1220 mm or 2420 mm; *only available for MOVE IT 25 system


Acoustic data

Equivalent sound absorption area (A_{eq})						
TYPE	125	250	500	1000	2000	4000 Hz
square grid inlay	0.73	1.47	1.73	2.20	2.67	2.77
half grid inlay	0.57	0.83	0.93	1.27	1.57	1.57
double grid inlay	1.30	2.73	3.20	4.10	4.97	5.23
triangle inlay	0.33	0.57	0.73	0.97	1.27	1.33

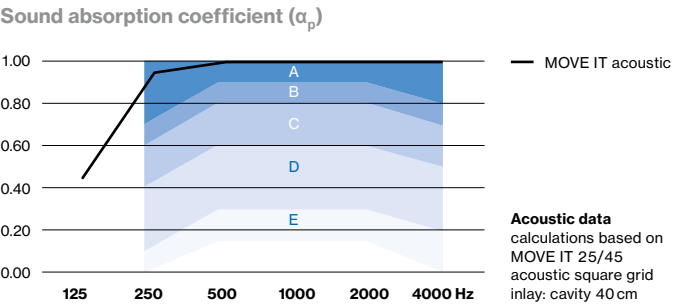


Configuration examples


MOVE IT 25 system

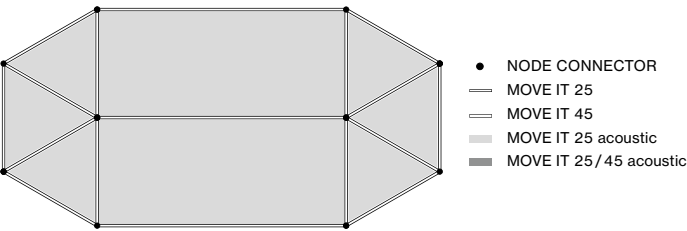

MOVE IT 45 system

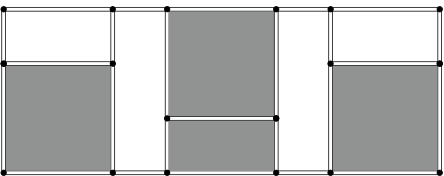

MOVE IT 25 / 45 system

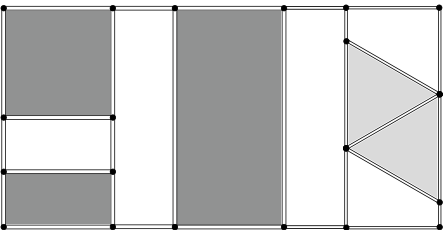

MOVE IT 25 system



MOVE IT 45 system