

SASSO 60 emergency light selftest

trimless

048-2693227 048-2696117



Project / Type
Notes
Count / Date



General

Ceiling Recessed
rotation 360°
white RAL 9016 ¹
Mounting set traffic white
IP20
206 ² , 208 ³ , 217 ⁴ lm

LED

6500 K
CRI ≥ 80

Optical

emergency light beam angle 21° ² , 103°x25° ³ , 149°x150° ⁴
--

Electrical

PC2 220-240 V
system 1.0 W
system 206 ² , 208 ³ , 217 ⁴ lm/W ⁵

Physical


trimless
diameter 73 mm height 94 mm
0.36 kg

Cutout


diameter 73 mm
recessed depth 110 mm

Round LED emergency light inset; surface lacquered in white; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; selftest with status LED; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

Light distribution

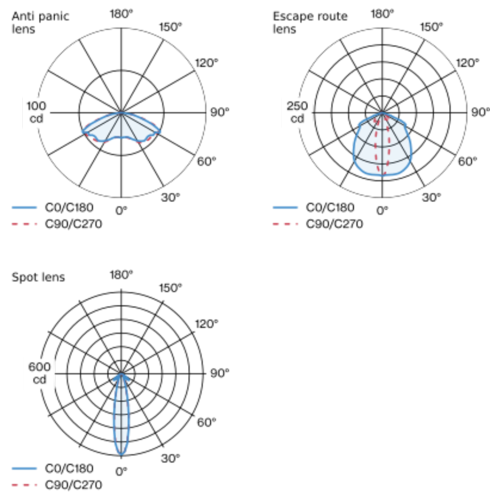

Product drawing



¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



SASSO 60 emergency light selftest

trimless

048-2693227 048-2696117



Project / Type

Notes

Count / Date

Components

MOUNTING SET trimless

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for plasterboard ceilings 12.5/15/25 mm	traffic white	73	048-2696117



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



Electrical accessories

REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

