


# SASSO 40 round downlight

trim 2 lamps

048-2800617S 048-2898318 002-90753




Project / Type
Notes
Count / Date

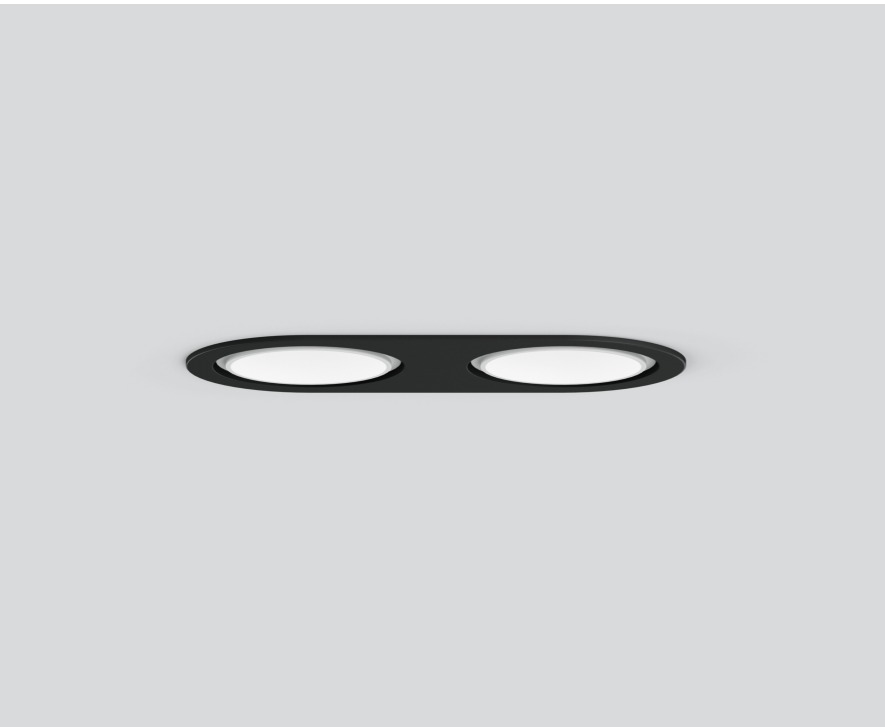

Round recessed spotlight in die-cast aluminium; 2 lamps; surface white; , installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR  $\leq 10$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq 1500$  cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Ceiling   Recessed
rotation 360°
white   RAL 9016 <sup>1</sup>
jet black
front IP44   back IP20
792 lm
fixture 78 lm/W <sup>2</sup>

## LED

4000 K
CRI $\geq 90$
L85 / 50000 h
initial MacAdam $\leq 3$ SDCM
R <sub>g</sub> : 94   R <sub>r</sub> : 87   R <sub>t(1-5)</sub> : 90
MR 0.86   MDER 0.78

## Optical

spot   beam angle 15°
UGR $\leq 10$   $\geq 65^\circ$ $< 1500$ cd/m <sup>2</sup>
PstLM $\leq 1.0$ <sup>3</sup>   SVM $\leq 0.4$ <sup>3</sup>

## Electrical

DALI-2
PC2   220-240 V
system 12.0 W   fixture 5.1 W
total fixtures 10.2 W
12 Vf   450 mA

## Physical

trim
length 122 mm   width 60 mm   height 50 mm
0.61 kg

## Cutout

diameter 56 mm   length 114 mm   width 114 mm
min. ceiling thickness 2 mm   max. ceiling thickness 25 mm
recessed depth 120 mm

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses  
<sup>3</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

